

View X - X (Female)

Connections

Pin		
1	White	
2	Brown	
3	Grey	
4	Yellow	
5	Green	
Housing	Screen	


Open-end

Label text example

L01-901-D-150
www.rodantech.com
2016W42



Year Week
format ISO 8601

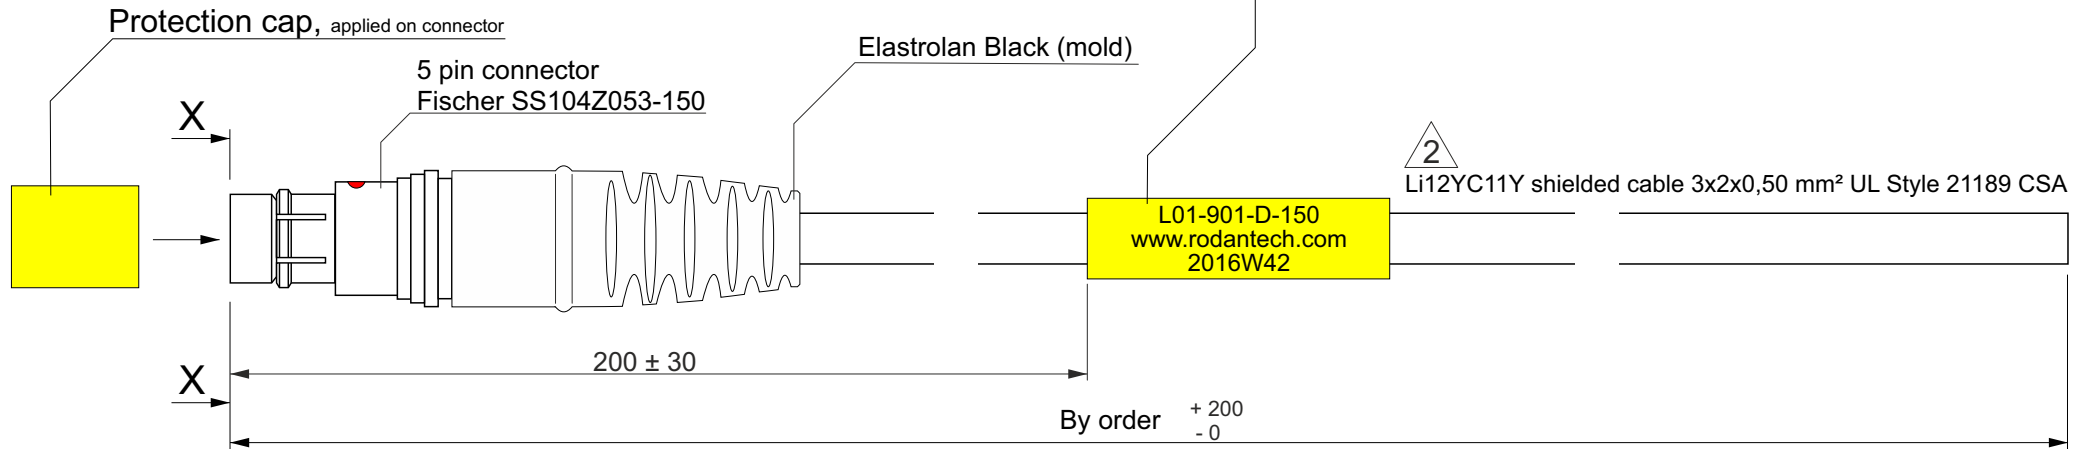

Li12YC11Y shielded cable 3x2x0,50 mm² UL Style 21189 CSA

By order +200
-0

Ordering information.

L01-901-D-150

Rodan Technologies part number	decimeter	length in decimeter eg 150 = 15 m
For use of own part number Contact Sales Department		Specify the desired length

1 Label specifications:
Material Type: Self-Laminating Vinyl
Printable area: Color Yellow, 40 x 15 mm, Max. 6 lines of 35 characters in 6 p size (min. font size).
It is possible to get your own product number and / or company name on the label.

2 Detail description of the cable, see cable Data sheet: Wind Turbine Cable_5703269340775

3 Circuit test of all connections and test for short circuit on all connections.

EI test: Connections / Shorts [2D]		Date	Tolerances unless noted: ± 10 mm	
Page 1 of 1			RODAN	
Designer	SG	161101		
Created by	Rodan Technologies A/S	161101	Drawing format	Scale
Last ECO	no: .		A4	
Title Cable for FT702LT xxx meter RS485		Version 03	Drawing no. L01-901-D-xxx	